


### Panamatic Mini & Midi Waste Height

Range between:-

- 370 mm Maximum
- 260 mm Nominal
- 180 mm Minimum

to centre of pipe

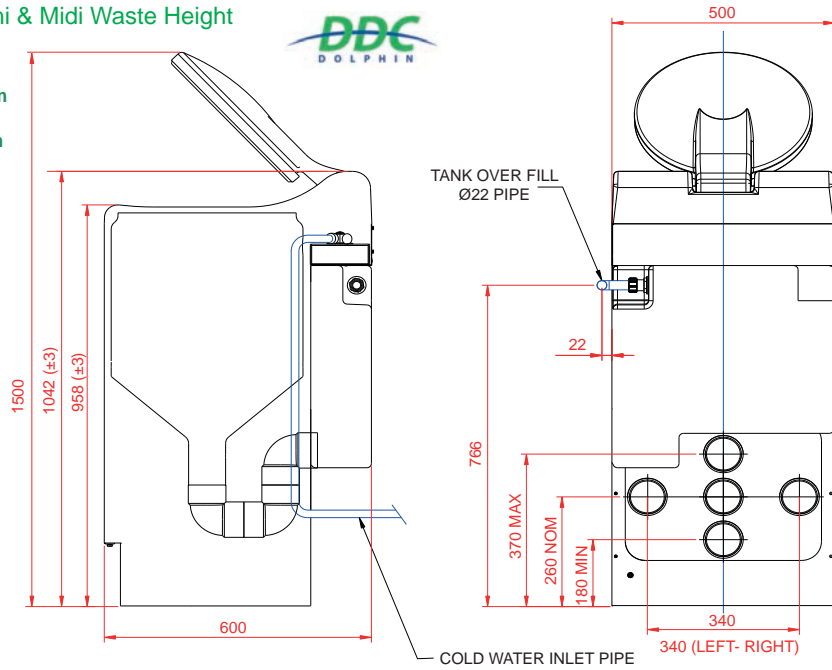

### Panamatic Midi : Product Data



The Fulcrum, Vantage Way, Poole, Dorset BH12 4NU  
tel: +44 (0) 1202 731555 | fax: +44 (0) 1202 731666  
info@ddcdolphin.co.uk

[www.ddcdolphin.co.uk](http://www.ddcdolphin.co.uk)

DDC Dolphin, Pulpmatic, Panamatic, Incomatic, Hygenex, MicrobeSafe are Registered Trademarks

# The Panamatic Midi

## Large capacity washer disinfector saving time and cutting costs

The Panamatic Midi brings further innovations to our market leading range of washer disinfectors. A combination of high pressure rotating wash nozzles and strategically sited spray jets ensure a superior wash performance and thermal disinfection complies with the very latest standards and guidelines. With its large top opening allowing easier loading and greater capacity being able to process two pots and one bottle at a time, the Panamatic Midi helps you clear workloads quickly and effectively, saving time and cutting costs. With improved performance and short cycle time, both power and water consumption have been reduced helping to save money and the environment.

**Patented hands free operation** - The Panamatic Midi also benefits from our patented completely hands free open and close mechanism operated by means of a foot cup at the base of the machine and a top mounted optical sensor to close and start the machine. This makes the Panamatic Midi not only more convenient, but also more hygienic to use than other pan washer disinfectors and greatly reduces the potential for cross contamination.

**Automatic disinfection** - Thermal disinfection complies with the very latest standards and guidelines, including HTM2030.

**Easy service programme** – Service support is provided by our own specialist and highly skilled engineers and we offer a choice of fully comprehensive service contracts focused on individual customer needs.



**MicrobeSafe**<sup>®</sup>  
Antimicrobial Surface

## Key Features

Patented hands free open and close operation

Dual antimicrobial action

Large capacity

Increased wash performance

Automatic disinfection

Easy to use

Easy to install

Easy service programme

Due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those described in this brochure

General	
Stainless Steel grade:	304
Dimensions: w x h x d	500 x 1042 (±3) x 600 mm
Weight:	Dry 57kg
Capacity:	2 pots + 1 urine bottle
Operation cycle time:	7 minutes
Decibel rating:	47.4 dba
Electrical	
Voltage: 110V	N/A
Voltage: 230V	50Hz dedicated 13A breaker
Voltage:230V	60Hz dedicated 13A breaker
Voltage: 415V	N/A
Cable connection: 230V	3 core sheathed x 1.5mm <sup>2</sup> , 2m long
Cable connection: 415V	N/A
Circuit Protection:	30mA RCD, GFI, IEC60364 compliant
Rated power input:	2.55kW
Electrical consumption per cycle:	0.22kW
Steam generator power:	2.5kW
Motor power:	N/A
Pump power:	0.425kW
Water	
Water connection:	¾" BSP male fittings required
Water pressure:	Cold water ¾" 0.5-10 bar
Water flow rate (Min):	12 Litres per minute at 1 bar
Water tank capacity:	20 Litres
Water consumption per cycle:	21 Litres
Waste connection:	N.B. 75mm (3")
Overflow connection:	22mm
Disinfection	
Recommended disinfection detergents:	EcoWash+ or EcoWash+ Ultimate
Disinfection tank volume: (external)	5 Litres
Disinfection dosing per cycle:	30 Millilitres